



“CLOCK” Function

** Only the motorised monitor have the following settings




■ Press the button “CLOCK” to enter the menu, and adjust by left, right, up & down button, and also the button “ENTER” to confirm.

1. Power On mode

OPEN ----It means the monitor turn to “work” status when power on.

STOP----It means the monitor will stay the status before power on.

CLOSE ---It means the monitor will turn to the “close” status when power on.

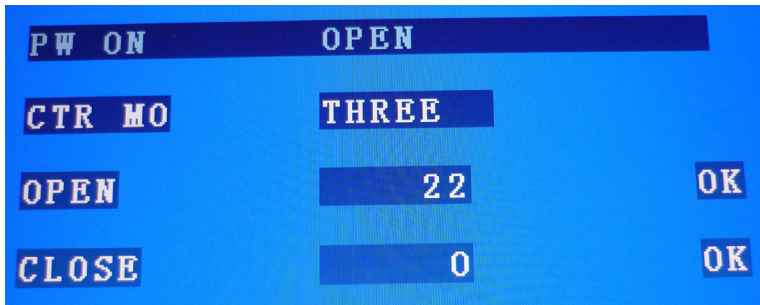


2. CTR MO ---The control mode of the monitor

ONE ---The monitor will be controlled by one pin switch line.


VOLTAGE ----The monitor will be controlled by voltage.

SIGNAL ----The monitor will work if there is video input
(Make sure the monitor is on power)

THREE ----The monitor will be controlled by three pin switch line. (Standard setting)

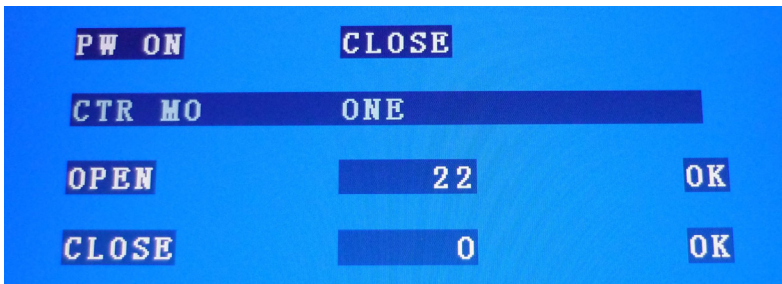

3. OPEN --- Fine turning of the angle when the monitor is at “open” status.

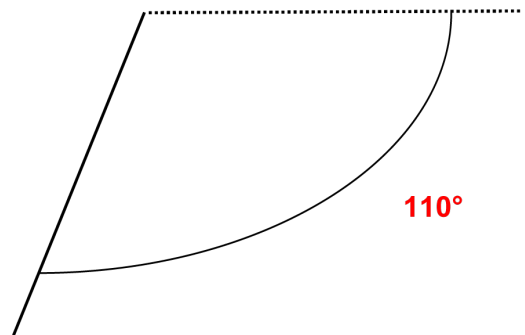

4. CLOSE---Fine turning of the angle when the monitor is at “close” status.

Note: We suggest do not change the setting of the “CLOSE”. Just make the value stay at “0”

• When the value of “OPEN” is 20, the angle of monitor is 110°, you can change the value to fine turning the angle.

• When the value of “CLOSE” is 0, the angle of monitor is 0°, you can change the value to fine turning the angle.



Three pin switch line

NESSA

WEB: <http://www.nesavision.com.au>

1300 1 fleet (35338) FAX: 08-9383 7933