

Our products come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. This warranty is provided in addition to your rights under the Australian Consumer Law. Netronics warrants that this product is free from defects in material and workmanship for a period of 12 months from the date of purchase or for the period stated on the packaging. This warranty is only valid where you have used the product in accordance with any recommendations or instructions provided by Netronics. This warranty excludes defects resulting from alterations of the product, accident, misuse, abuse or neglect. In order to claim the warranty, you must return the product to the retailer from which it was purchased. If you are unable to return the product to the retailer, you must send it to Netronics. The retailer will then return the goods to Netronics. Netronics will repair, replace or refurbish the product at its discretion. The retailer will contact you when the product is ready for collection. All costs involved in claiming this warranty, including the cost of the retailer sending the product to Netronics, will be borne by you.

Neltronics Address: 273 Great Eastern Hwy, Belmont, Western Australia  
Ph: +61 08 9383 7833 Email: [admin@neltronics.com.au](mailto:admin@neltronics.com.au)

[illegible]

UNDER NO CIRCUMSTANCES WILL NESA BE LIABLE IN ANY WAY FOR ANY CONTENT, INCLUDING, BUT NOT LIMITED TO, THE LOSS OF CONTENT, ANY ERRORS OR OMISSIONS IN ANY CONTENT, OR ANY LOSS OR DAMAGE OF ANY KIND INCURRED IN CONNECTION WITH USE OF OR EXPOSURE TO ANY CONTENT, INCLUDING, BUT NOT LIMITED TO, ANY LOSS OR DAMAGE OF ANY KIND INCURRED IN CONNECTION WITH THE USE OF ANY CONTENT, OR ANY BREACH OF DUTY OR OBLIGATION, DELAY IN PERFORMANCE, NON-PERFORMANCE, OR MALPERFORMANCE SHALL BE PRECLUDED, EXCEPT WHEN THESE ARE DUE TO NEGLECT BREACHES OF ANY SIGNIFICANT CONTRACTUAL DUTY OR OBLIGATION ON THE PART OF NESA. ANY LIABILITY FOR SUCH BREACHES OF DUTY OR OBLIGATION SHALL BE LIMITED TO THE EXTENT OF THE ACTUAL DAMAGES INCURRED BY THE USER. ANY LIABILITY ON WILFUL OR GROSSLY NEGLIGENT BREACH OF CONTRACTUAL DUTY OR OBLIGATION ON THE PART OF NESA, THE PRECLUSION AND LIMITATION OF LIABILITY MENTIONED IN THE PRECEDING SENTENCES WILL NOT APPLY, THE PRECEDING PRECLUSION AND LIMITATION OF LIABILITY WILL ALSO NOT APPLY TO THE EXTENT OF THE ACTUAL DAMAGES INCURRED BY THE USER. THE PRECLUSION AND LIMITATION OF LIABILITY WILL ALSO NOT APPLY TO NON-CONTRACTUAL LIABILITY, SOME STATES AND COUNTRIES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU, ADDITIONALLY, THIS PROVISION IS NOT INTENDED TO LIMIT THE REMEDY AVAILABLE TO YOU UNDER APPLICABLE LAW.




**NESA®**

1. Specification

Screen	9.6 Inch
Brightness	600 nit
Display resolution	320x1280
Camera input	CVBS / 720P / 1080P
Current	Working: 350mA, Standby: 89mA
Working voltage	DC10-24V input, output DC12V to cameras
Display views	AHD1 / AHD2 (Rear View): Standard display AHD2 (Reverse View): In the reverse mode the portion of the camera image shown is the low part to suit reversing operation. (Reverse trigger)
Guide line	On / Off / Adjustable
Working temperature	-25°C- 70°C

2. Wiring



**RED:** 12/24V(ACC or Ignition power)

**BLACK:** Ground(ensure clean ground connection to prevent problems)

**GREEN:** Trigger CH2 Displays camera 2 in **Reverse View** when 12/24V is applied. This will show the lower part of the camera image with guidelines (If configured).

**Do not** connect the Trigger to a constant power source as this will disable all other functions and lock the monitor with AHD2 in Reverse View.

This trigger can be connected to the reverse circuit or through a switch for a manual operation.

Guidelines: There are multiple guidelines available, go to the menu and when in the guideline section cycle through the available options to choose the most suitable.

3. Monitor Operation

The monitor will start in whichever LCD state is was in when turn off, e.g. 1) If CH1(AHD1) was on last time then it start with AHD1 displayed; 2) If it was off it will still be off; 3) If AD2 was on, this will be shown.

Use the button on the bottom of the screen to operated the monitor.


**Short Press:** Turn on⇒ Switch channels: AHD1⇒ AHD2⇒ Off(Sequencial function) If starting on CH2 this will be: AHD2⇒AHD1⇒ Off

**Long Press(2s):** Enter Menu⇒ *Brightness - Contrast - Saturation - Tint - Guideline - Reset*

Use a short press when in the required menu to change the setting.


Camera Display

To retain the correct image proportion only a section of the full vertical camera image is displayed, please adjust the camera position accordingly.

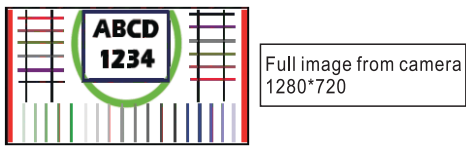


Standard View

AHD1 and AHD2 (Rear View)



Reverse View

In the reverse mode the portion of the camera image shown is the low part to suit reversing operation.



★ Image quality may very according to the camera used, not responsibility is taken when used with cameras not supplied by the monitor's manufacturer.