
# **MCCD-655**

### **FUNCTION**

Camera has three working positions.


### 1. Protection

The camera lens rotates into the sun shield when the monitor is turned off or switched to a channel other than CAM3.




### 2. Reverse


The camera lens rotates to 45° downward angle when the reverse signal is triggered.




### 3. Rear view

The camera lens rotates to the 90° rear view position when the monitor is switched to CAM3.






## Wiring



## ASSEMBLY


## **■ CAMERA**

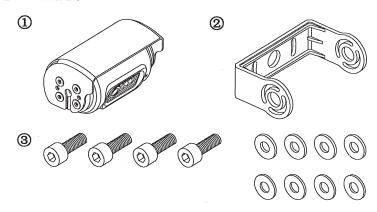

- ① Camera (undetachable) X1 (housing, sunshield, and spacer included)
- ② U-bracket for camera X1
- ③ Assembly parts for U-bracket
   Washer M4\*1 (nylon)
   Washer M4\*0.8 (stainless steel)

  X4
  X4
  - Washer M4\*0.8 (stainless steel)
    Hex head screw M4\*12 (stainless steel)
    X4
    X4


### **■** ACCESSORIES




Operating instruction	X1
Screw driver for hex head screw	X1

## INSTALLATION


- (1) Find an appropriate location for installation (Illustration 1).
- (2) Drill holes according to the size of U-bracket as illustration 3 and fix the U-bracket as illustration 2.

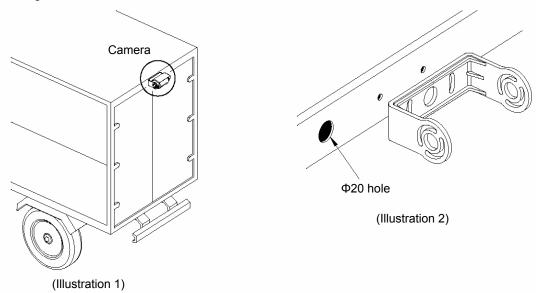

- (3) Drill a  $\Phi$ 20mm next to the U-bracket (Illustration 2).
- (4) Fix the camera to the U-bracket (illustration 4).

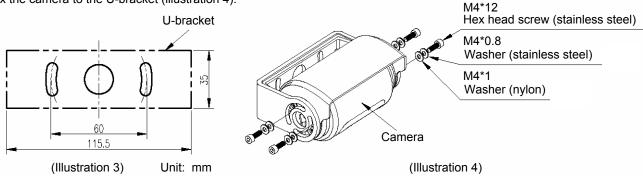

(5) Connect the camera tail and the extension cable inside the car (Illustration 5).

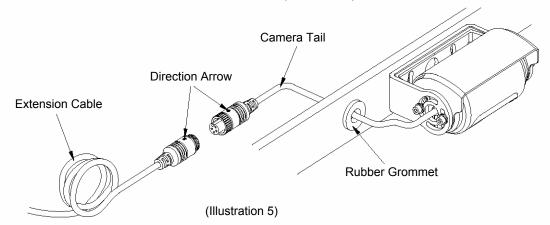

(6) Loosen the screw between the camera and the fixed U-bracket and adjust the camera to a best viewing angle (Illustration 6).

