

## Installation Connections Checklist


Customer:

Device ID:  Vehicle Model:

Rego/ Fleet No:  Date (DDMMYY):  /  /

Installer:

### Optional wiring for connecting relay for engine hours recording

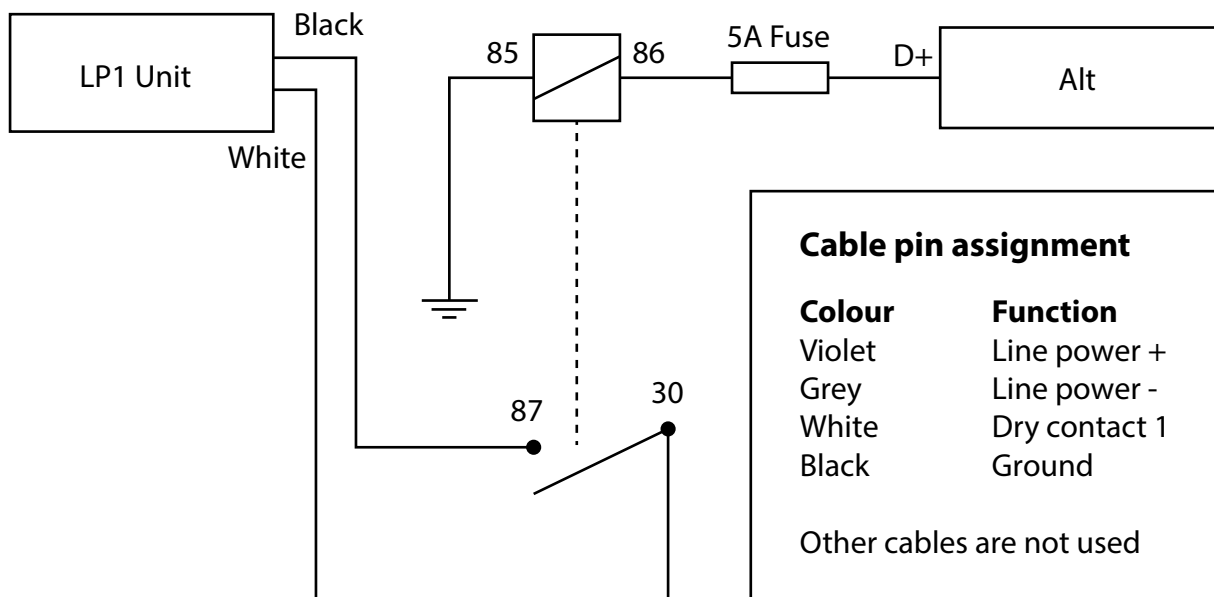

### Turning On and Off

To turn the device 'On' or 'Off', remove the connector cover from the end of the device. Then invert and replace the connector cover so that the word 'Off' or 'On', whichever is desired is visible.



Device OFF



Device ON

## Installing Batteries

The LP1 is powered by two or four Lithium 'AA' batteries. The battery compartment is accessible from the top of the device by removing the six flat-head screws. Remove the water-tight cover and insert the batteries as indicated. If using only two batteries, place both batteries together on one side of the LP1 device as shown below.

\*Note that when using two batteries they should only be put in the slots as shown below.

\*When the batteries are removed and replaced the device will retain its configuration.

